


DOUBLE DISHDRAWER™ TALL DIMENSIONS

DD24DDFTX7, DD24DTI7, DD24DHTI7, DD24DCTX7, DD24DCHTX7, DD24DCTB7, DD24DCTW7

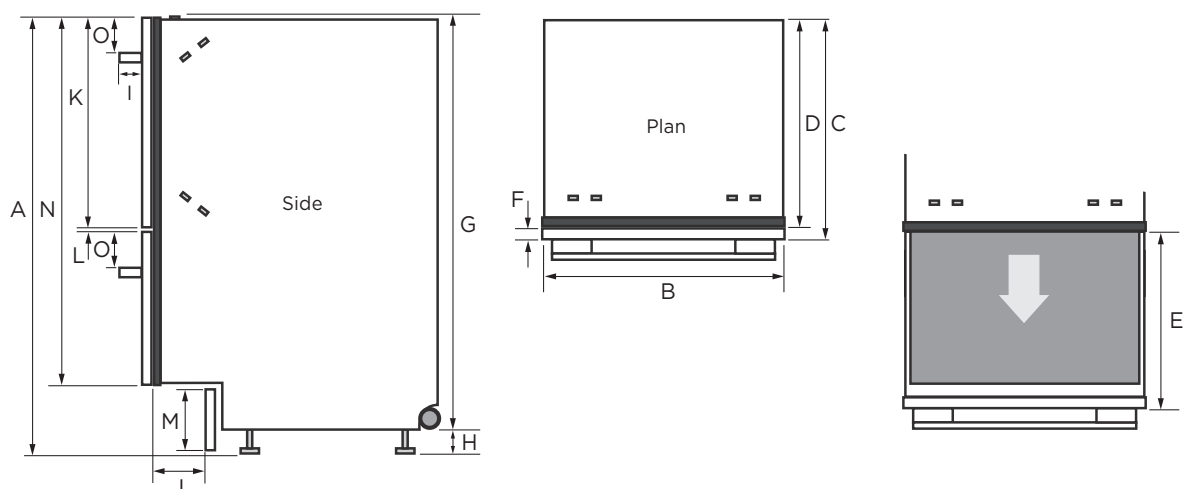

DIMENSIONS INCHES (MM)

	DD24DDFTX7	DD24DTI7, DD24DHTI7	DD24DCTX7, DD24DCHTX7	DD24DCTB7, DD24DCTW7
	Designer	Integrated Designer	Classic	Black Classic, White Classic
A overall height ¹ of product	34 - 36 ³ / ₁₆ " (864-924) ²	34 - 36 ³ / ₁₆ " (864-924) ²	34 - 36 ³ / ₁₆ " (864-924) ²	34 - 36 ³ / ₁₆ " (864-924) ²
B overall width of product	23 ⁹ / ₁₆ " (599)	23 ⁹ / ₁₆ " (599)	23 ⁹ / ₁₆ " (599)	23 ⁹ / ₁₆ " (599)
C overall depth of product (excl. handle)	22 ¹ / ₂ " (571)	22 ¹ / ₂ " (571) ³	22 ¹ / ₁₆ " (582)	22 ¹ / ₁₆ " (582)
D depth of chassis (to back of front panel)	21 ³ / ₄ " (553)	21 ³ / ₄ " (553)	21 ³ / ₄ " (553)	21 ³ / ₄ " (553)
E maximum extension of drawer (excl. handle)	21 ⁷ / ₁₆ " (545)	21 ⁷ / ₁₆ " (545) ³	21 ⁷ / ₈ " (556)	21 ⁷ / ₈ " (556)
F depth of front panel (excl. handle)	1 ¹ / ₁₆ " (18)	⁵ / ₈ - 1 ³ / ₁₆ " (16-20)	1 ¹ / ₈ " (29)	1 ¹ / ₈ " (29)
G height ¹ of chassis	33 ¹ / ₁₆ " (855)	33 ¹ / ₁₆ " (855)	33 ¹ / ₁₆ " (855)	33 ¹ / ₁₆ " (855)
H height of levelling feet	³ / ₈ - 2 ¹ / ₁₆ " (9-69) ²	³ / ₈ - 2 ¹ / ₁₆ " (9-69) ²	³ / ₈ - 2 ¹ / ₁₆ " (9-69) ²	³ / ₈ - 2 ¹ / ₁₆ " (9-69) ²
I depth of handle	1 ⁵ / ₈ " (41)	n/a n/a	n/a n/a	n/a n/a
J depth of toe kick recess (to back of front panel) ⁴	1 ³ / ₁₆ - 3 ⁵ / ₁₆ " (30-92)	1 ³ / ₁₆ - 3 ⁵ / ₁₆ " (30-84) ⁵	1 ³ / ₁₆ - 3 ⁵ / ₁₆ " (30-92)	1 ³ / ₁₆ - 3 ⁵ / ₁₆ " (30-92)
K height of upper front panel	17 ³ / ₈ " (442)	min. 17 ³ / ₈ " (442)	17 ¹ / ₄ " (438)	17 ¹ / ₄ " (438)
L ventilation gap between front panels	⁵ / ₁₆ " (8)	min. ⁵ / ₁₆ " (8)	³ / ₁₆ " (5)	³ / ₁₆ " (5)
M height of toe kick panel (adjustable)	2 ³ / ₄ - 4 ³ / ₄ " (70-120)	2 ³ / ₄ - 4 ³ / ₄ " (70-120)	2 ³ / ₄ - 4 ³ / ₄ " (70-120)	2 ³ / ₄ - 4 ³ / ₄ " (70-120)
N height of drawer fronts	29 ¹ / ₁₆ " (760)	min. 29 ¹ / ₁₆ " (760)	29 ¹ / ₁₆ " (754)	29 ¹ / ₁₆ " (754)
O height from top of handle to top of front panel	2 ¹ / ₂ " (64)	n/a n/a	n/a n/a	n/a n/a

¹includes ¹/₁₆" (2mm) high bracket slots ²depending on adjustment of levelling feet ³assuming front panel thickness of ¹/₁₆" (18mm) ⁴adjustable to match toe kick recess on adjoining cabinetry

⁵assuming that toe kick mounting bracket is used with a ¹/₁₆" (18mm) thick custom panel; if recess is between 1 ¹/₁₆" - 3 ⁵/₁₆" (50 and 84 mm) deep, the panel will need to be cut out - see step 'Custom panel calculations'


Product dimensions and specifications are listed as a guide only. For complete installation instructions and specifications, refer to the product Use & Care Guide/Installation Instructions available at www.fisherpaykel.com

Fisher & Paykel

fisherpaykel.com
1.888.9s.6.7872

DOUBLE DISHDRAWER™ TALL CABINETRY DIMENSIONS

DD24DDFTX7, DD24DTI7, DD24DHTI7, DD24DCTX7,
DD24DCHTX7, DD24DCTB7, DD24DCTW7

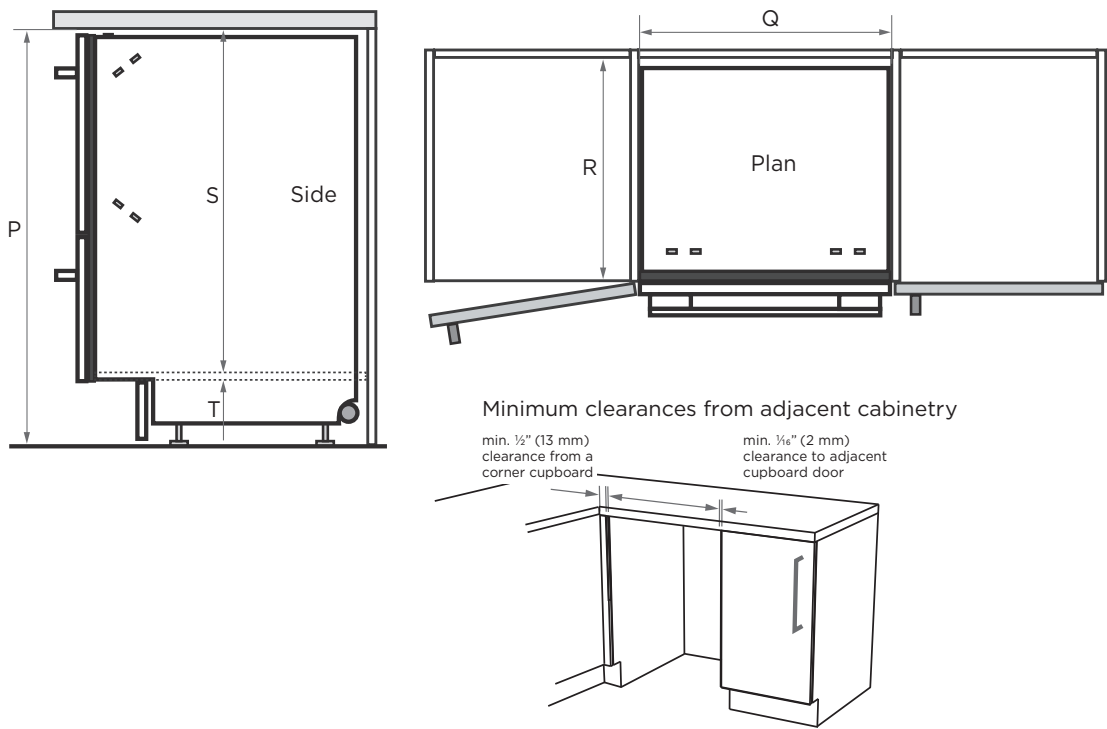

DIMENSIONS INCHES (MM)

	DD24DDFTX7	DD24DTI7, DD24DHTI7	DD24DCTX7, DD24DCHTX7	DD24DCTB7, DD24DCTW7
	Designer	Integrated	Classic	Black Classic, White Classic
P inside height of cavity*	min. 34" (864)	min. 34" (864)	min. 34" (864)	min. 34" (864)
Q inside width of cavity	23 5/8" (600)	23 5/8" (600)	23 5/8" (600)	23 5/8" (600)
R inside depth of cavity	min. 22 1/16" (560)	min. 22 1/16" (560)	min. 22 1/16" (560)	min. 22 1/16" (560)
S recommended height of adjacent cabinet space	30" (762)	min. 30" (762)	30" (762)	30" (762)
T height of toekick space*	3 15/16" - 6 5/16" (100-160)	3 15/16" - 6 5/16" (100-160)	3 15/16" - 6 5/16" (100-160)	3 15/16" - 6 5/16" (100-160)

*depending on adjustment of leveling feet

Product dimensions and specifications are listed as a guide only. For complete installation instructions and specifications, refer to the product Use & Care Guide/Installation Instructions available at www.fisherpaykel.com